




NACHI BEARINGS TRAINING INDUSTRY

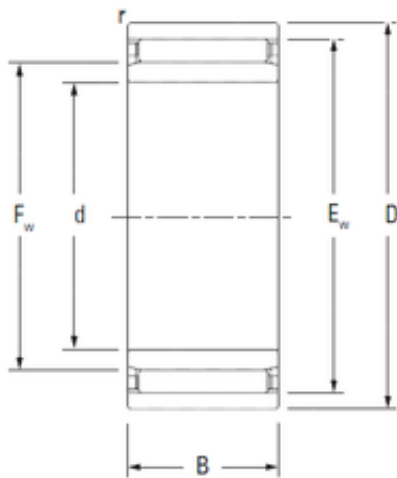

20 mm x 35 mm x 17 mm KOYO NAO20X35X17 needle roller bearings

Bearing No. NAO20X35X17

NAO20X35X17 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|------------------------------------|
| Bore Diameter | 20 mm |
| Outer Diameter | 35 mm |
| d | 20 mm |
| Fw | 25 mm |
| D | 35 mm |
| Ew | 30 mm |
| B | 17 mm |
| C | 17 mm |
| r5 min. | 0,3 mm |
| S | 1,2 mm |
| Weight | 0,073 Kg |
| Basic dynamic load rating (C) | 18,8 kN |
| Basic static load rating (C0) | 29,8 kN |
| (Grease) Lubrication Speed | 11000 r/min |
| Category | Needle Non Thrust Roller Bearings |
| Inventory | 0.0 |
| Manufacturer Name | KOYO |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.07 |
| Product Group | B04144 |
| Rolling Element | Needle Roller Bearing |
| Component | Complete with Outer and Inner Ring |
| Enclosure | Open |
| | |



NACHI BEARINGS TRAINING INDUSTRY

| | |
|---------------------------|--|
| Self Aligning | No |
| Retainer | Yes |
| Number of Rows of Rollers | Single Row |
| Separable | Inner/Outer Ring - Both Sides |
| Closed End | No |
| Inch - Metric | Metric |
| Relubricatable | No |
| Thrust Bearing | No |
| Long Description | 20MM Bore; 35MM Outside Diameter; 17MM Width; Needle Roller Bearing; Complete with Outer and Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; Inner/Outer Ring - Both Side |
| Other Features | Plain Inner Ring Plain Outer Ring Steel Cage |
| Category | Needle Non Thrust Roller Bearing |
| UNSPSC | 31171512 |
| Harmonized Tariff Code | 8482.40.00.00 |
| Noun | Bearing |
| Keyword String | Needle |
| Manufacturer URL | http://www.koyousa.com |
| Manufacturer Item Number | NAO20X35X17 |
| Weight / LBS | 0.161 |
| Bore | 0.787 Inch 20 Millimeter |
| Outside Diameter | 1.378 Inch 35 Millimeter |
| Width | 0.669 Inch 17 Millimeter |