




# NACHI BEARINGS TRAINING INDUSTRY

## 75 mm x 130 mm x 31 mm FAG 2215-K-TVH-C3 + H315 self aligning ball bearings

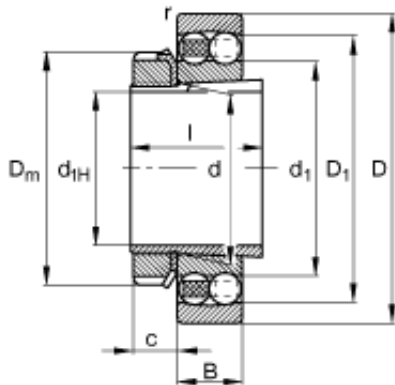

Bearing No. 2215-K-TVH-C3 + H315

2215-K-TVH-C3 + H315 Bearing 2D drawings and 3D CAD models

Size	65x130x31 mm
Bore Diameter	65 mm
Outer Diameter	130 mm
Width	31 mm
$d_{1H}$	65 mm
D	130 mm
B	31 mm
$B_{a\ min}$	12 mm
c	15 mm
$D_1$	114,3 mm
$D_{a\ max}$	121 mm
$D_m$	98 mm
d	75 mm
$d_1$	93,3 mm
$d_{a\ max}$	84 mm
$d_{b\ min}$	80 mm
l	55 mm
$r_{a\ max}$	1,5 mm
	H315 / Adapter sleeve
m	1,6 kg / Weight
$m_1$	0,84 kg / Weight, adapter sleeve
$C_r$	44500 N / Dynamic load rating (radial)
e	0,26



## NACHI BEARINGS TRAINING INDUSTRY

$Y_1$	2,47
$Y_2$	3,82
$C_{0r}$	17600 N / Static load rating (radial)
$Y_0$	2,59
$n_G$	5300 1/min / Limiting speed
$n_B$	6200 1/min / Reference speed
$C_{ur}$	1080 N / Fatigue limit load, radial